




Key Features

- 8M megapixel CMOS image sensor
- H.265 high-performance video compression
- Built-in IR Viewable Length up to 35M
- Built-in Warm Light Viewable length up to 30M
- Motorized varifocal lens for easy installation and monitoring
- HDR function up to 120dB
- IVS / AI supported
- Digital I/O : 1 in, 1 out
- ONVIF Profile S / T / G / M
- IP67 water and dust resistant

Dimensions

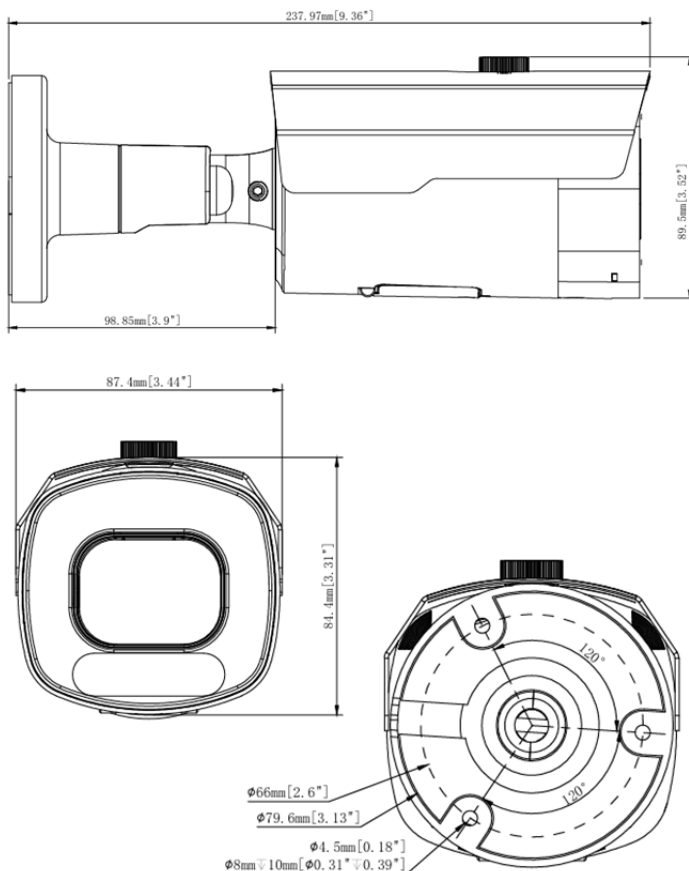

AI 8M Smart Dual Light Bullet Camera

Max. Resolution	8MP (3840×2160)
Focal Length	2.8 – 12mm
Field of View	107° (W) - 34° (T) (Horizontal) 56° (W) - 19° (T) (Vertical) 129° (W) - 39° (T) (Diagonal)
Shutter Time	1/5 sec. to 1/20,000 sec.
IR Viewable Length	35M
Warm Light Viewable Length	30M
Minimum Illumination	0.007 Lux at F1.0(Color) 0 Lux at F1.0(B/W) 0 lux with IR illumination on
Memory card slot	Support (256GB) Micro SD/SDHC/SDXC card (card is not included)
AI Feature	Face Recognition, Pedestrian & Vehicle, Perimeter Intrusion, Line Crossing, Object Detection, Crossing Counting, Heat Map, Crowd Density, Queue Length, License Plate, Rare Sound, Intrusion, Region Entrance, Region Exiting
Video Compression	H.265, H.264
Maximum Frame Rate	30 fps
Maximum Streams	3 video streams
S/N ratio	More than 47dB
HDR	Up to 120dB
Audio Compression	G.711 u-law
Audio Interface	External microphone input, External line output
Network interface Protocol	10 Base-T/100 Base-TX Ethernet (RJ-45) TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP,SMTP, NTP, UPnP, SNMP, HTTPS, FTP, Onvif Profile S, T, G, M
Casing	IP 67
Connectors	RJ-45 cable connector for 10/100 Mbps PoE Audio line input Audio line output DC 12V power input Digital input*1, Digital output*1
Power Input	DC12V PoE+ (IEEE 802.3af class)
Power Consumption	DC12V, 8.7W / PoE+, 10.4W
Dimension	87.4 × 89.5 × 238 mm
Weight	844g
Certifications	CE / FCC
Starting Temperature	-35°C – +60°C
Operating Temperature	-35°C – +60°C
Storage temperature	-35°C – +60°C
Humidity	0% – 95% RH
Web browser	IE10/11, Google chrome V.57 above, Edge V.79 above Safari V12.1 above

