




Key Features

- 5M megapixel CMOS image sensor
- H.265 high-performance video compression
- Built-in IR Viewable Length up to 35M
- Built-in Warm Light Viewable length up to 30M
- Motorized varifocal lens for easy installation & monitoring
- IVS / AI supported
- Digital I/O : 1 in, 1 out
- ONVIF Profile S / T / G / M
- IP67 water and dust resistant

Dimensions

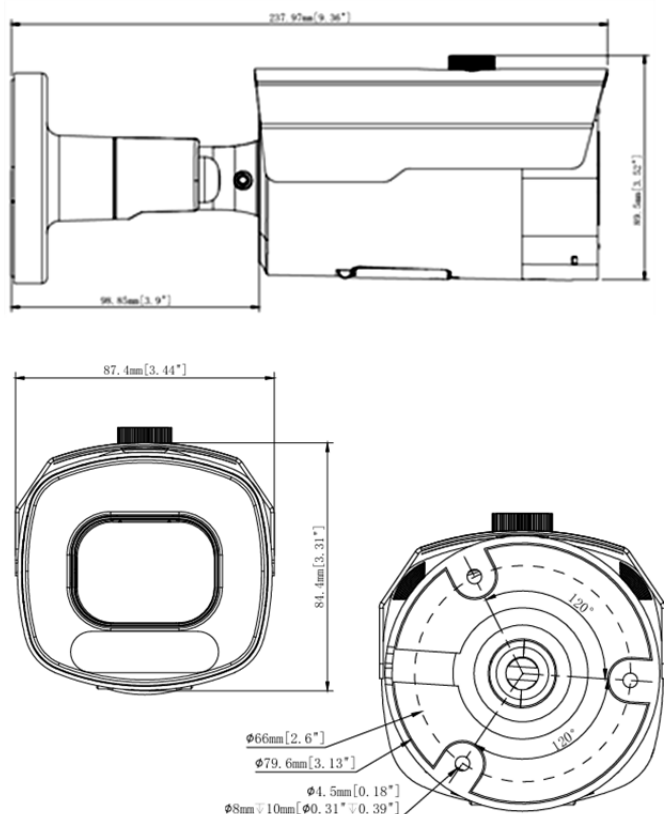

AI 5M Smart Dual Light Bullet Camera

Camera Feature	
Max. Resolution	5MP (2880 × 1620)
Focal Length	2.8-12mm
Field of View	113° (W) - 35° (T) (Horizontal) 59° (W) - 20° (T) (Vertical) 138° (W) - 41° (T) (Diagonal)
Shutter Time	1/5 sec. to 1/20,000 sec.
IR Viewable Length	35M
Warm Light Viewable Length	30M
Minimum Illumination	0.002Lux at F1.0(Color) 0 Lux at F1.0 (B/W) 0 lux with IR illumination on
Memory card slot	Support (256GB) Micro SD/SDHC/SDXC card (card is not included)
AI Feature	Face Recognition, Pedestrian & Vehicle, Perimeter Intrusion, Line Crossing, Object Detection, Crossing Counting, Heat Map, Crowd Density, Queue Length, License Plate, Rare Sound, Intrusion, Region Entrance, Region Exiting
Video	
Video Compression	H.265, H.264
Maximum Frame Rate	30fps
Maximum Streams	3 video streams
S/N ratio	More than 38dB
HDR	Up to 120dB
Audio	
Audio Compression	G.711 u-law
Audio Interface	External microphone input, External line output
Network	
Network interface	10 Base-T/100 Base-TX Ethernet (RJ-45)
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP, OnvifProfile S, T, G, M
General	
Casing	IP 67
Connectors	RJ-45 cable connector for 10/100 Mbps PoE Audio line input(RCA) Audio line output(RCA) DC 12V power input Digital input*1, Digital output*1
Power Input	DC12V PoE+ (IEEE 802.3af class)
Power Consumption	DC12V, 6.9W / PoE+, 8.1W
Dimension	87.4 × 89.5 × 238 mm
Weight	844g
Certifications	CE / FCC
Starting Temperature	-35°C ~+60°C
Operating Temperature	-35°C ~ +60°C
Storage temperature	-35°C ~ +60°C
Humidity	0% – 90% RH
System Requirements	
Web browser	IE10/11, Google chrome V.57 above, Edge V.79 above, Safari V12.1 above



MARSON TECHNOLOGY CO., LTD.
TEL: +886-2-2218-1633
FAX: +886-2-2218-6638
Email: info@marson.com.tw